

REMOTE PRESENTER KIT

SOFTOBX LIGHTS SETUP



- Turn the wing nut counterclockwise (Figure 1) to expand the legs, adjust the foot print size, then tighten the wing nut.



FIGURE 1



FIGURE 2

- Loosen the wing nut (Figure 3) to expand stand sections, adjust each section length until the stand height is suitable for working, then tighten the wing nut.

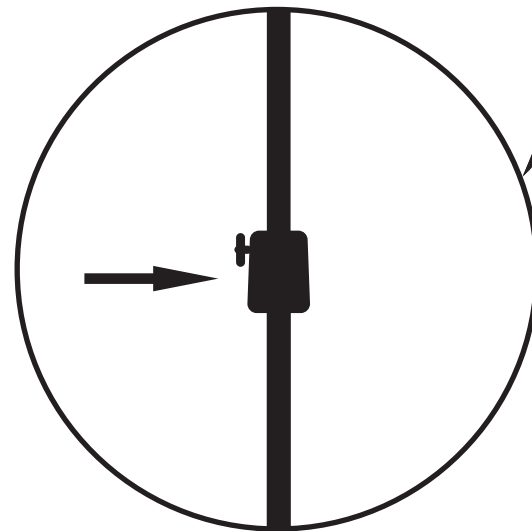


FIGURE 3


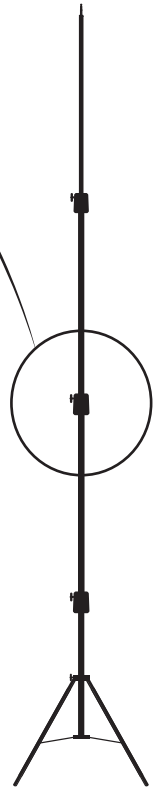


FIGURE 4

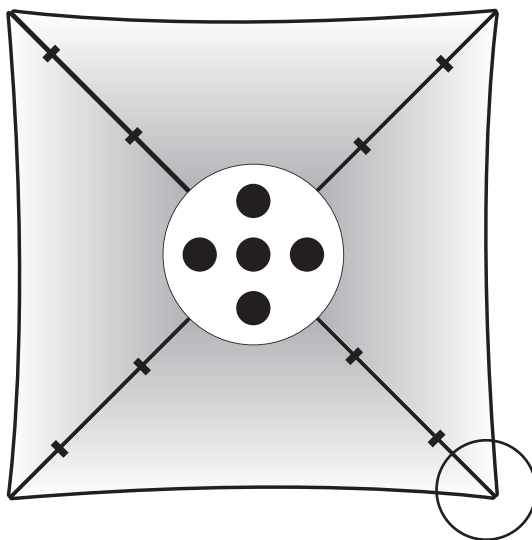

- Stretch the hole on the center of the softbox tent, insert light socket through the hole, fit the hole with velcro around the light socket securely (Figure 4).

- Insert the PLAIN END of the rod into the light socket and insert the other end of the rod under the velcro pocket in the corner of the tent (Figure 5).

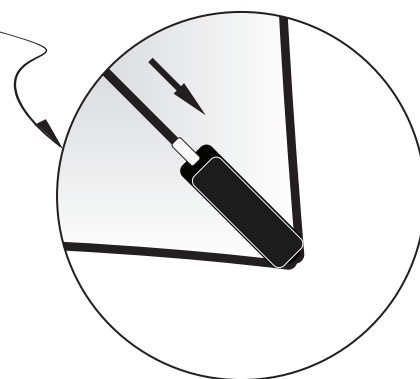


FIGURE 5



FIGURE 6



FIGURE 7

- Loosen the wing nut at the base of the light socket (Figure 6) and fit it on the top of the stand (Figure 7), then tighten the wing nut.



FIGURE 8

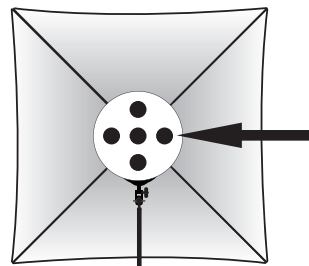


FIGURE 9

- Insert light bulbs into the light sockets (Figure 9).

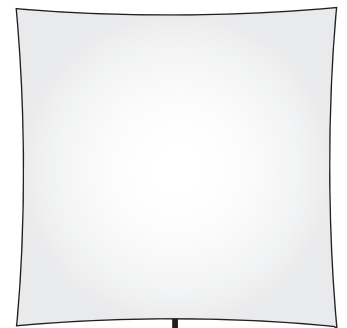


FIGURE 11

- Attach the inner diffusion on the softbox tent with velcro, and secure the top diffusion around the four corners of the softbox tent with velcro (Figure 11).